


Triac/0-10V/DALI/PUSH/RF/PWM/Zigbee Dimmable

Constant Voltage											
Model	Factor	调光方式 Dimming Type						Output voltage¤t		Weight(g)	Size(mm)
		Triac	0-10V	DALI	PUSH	RF	PWM				
DR-CV-12	PF>0.95	✓	✓	✓	✓	✓	✓	12V 1000mA		212	115*38*22
	PF>0.5 No Flash	✓	✓	✓	✓	✓	✓	24V 500mA			
DR-CV-20	PF>0.95	✓	✓	✓	✓	✓	✓	12V 1500mA		248	115*38*22
	PF>0.5 No Flash	✓	✓	✓	✓	✓	✓	24V 830mA			
DR-CV-30	PF>0.95	✓	✓	✓	✓	✓		12V 2000mA		472	125*42*28
	PF>0.5 No Flash	✓	✓	✓	✓	✓	✓	24V 1250mA			
DR-CV-40	PF>0.95	✓	✓	✓	✓	✓	✓	12V 3000mA		472	125*42*28
	PF>0.5 No Flash	✓	✓	✓	✓	✓	✓	24V 1700mA			
DR-CV-60	PF>0.95	✓	✓	✓	✓	✓	✓	12V 4000mA		608	155*42*28
	PF>0.5 No Flash	✓	✓	✓	✓	✓	✓	24V 2500mA			
DR-CV-80	PF>0.95	✓	✓	✓	✓	✓	✓	12V 5000mA		616	180*42*28
	PF>0.5 No Flash	✓	✓	✓	✓	✓	✓	24V 3300mA			
DR-CV-100	PF>0.95	✓	✓	✓	✓	✓	✓	12V 7000mA		984	180*44*32
	PF>0.95		✓	✓	✓	✓	✓				
	PF>0.5 No Flash	✓	✓	✓	✓	✓	✓	24V 4200mA			
DR-CV-140	PF>0.95		✓	✓	✓	✓	✓	12V 10A		610	180*44*32
	PF>0.5 No Flash		✓	✓	✓	✓	✓	24V 6A			
DR-CV-180	PF>0.95		✓	✓	✓	✓	✓	12V 13A		650	200*56*35
	PF>0.5 No Flash		✓	✓	✓	✓	✓	24V 7.5A			
DR-CV-240	PF>0.95		✓	✓	✓	✓	✓	12V 16A		810	215*62*38
	PF>0.5 No Flash		✓	✓	✓	✓	✓	24V 10A			
DR-CV-300	PF>0.95		✓	✓	✓	✓	✓	12V 20A		1020	215*62*38
	PF>0.5 No Flash		✓	✓	✓	✓	✓	24V 13A			
DR-CV-360	PF>0.95		✓	✓	✓	✓	✓	12V 24A		1200	257*68*39
	PF>0.5 No Flash		✓	✓	✓	✓	✓	24V 15A			


Triac/0-10V/DALI/PUSH/RF/PWM/Zigbee Dimmable

Shell structure

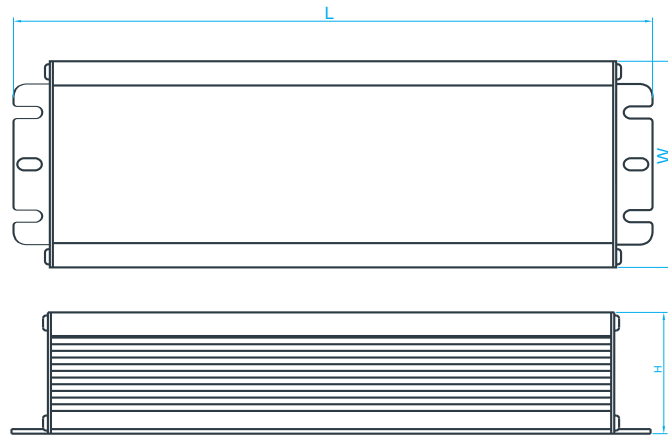

Units:mm

Wiring diagram

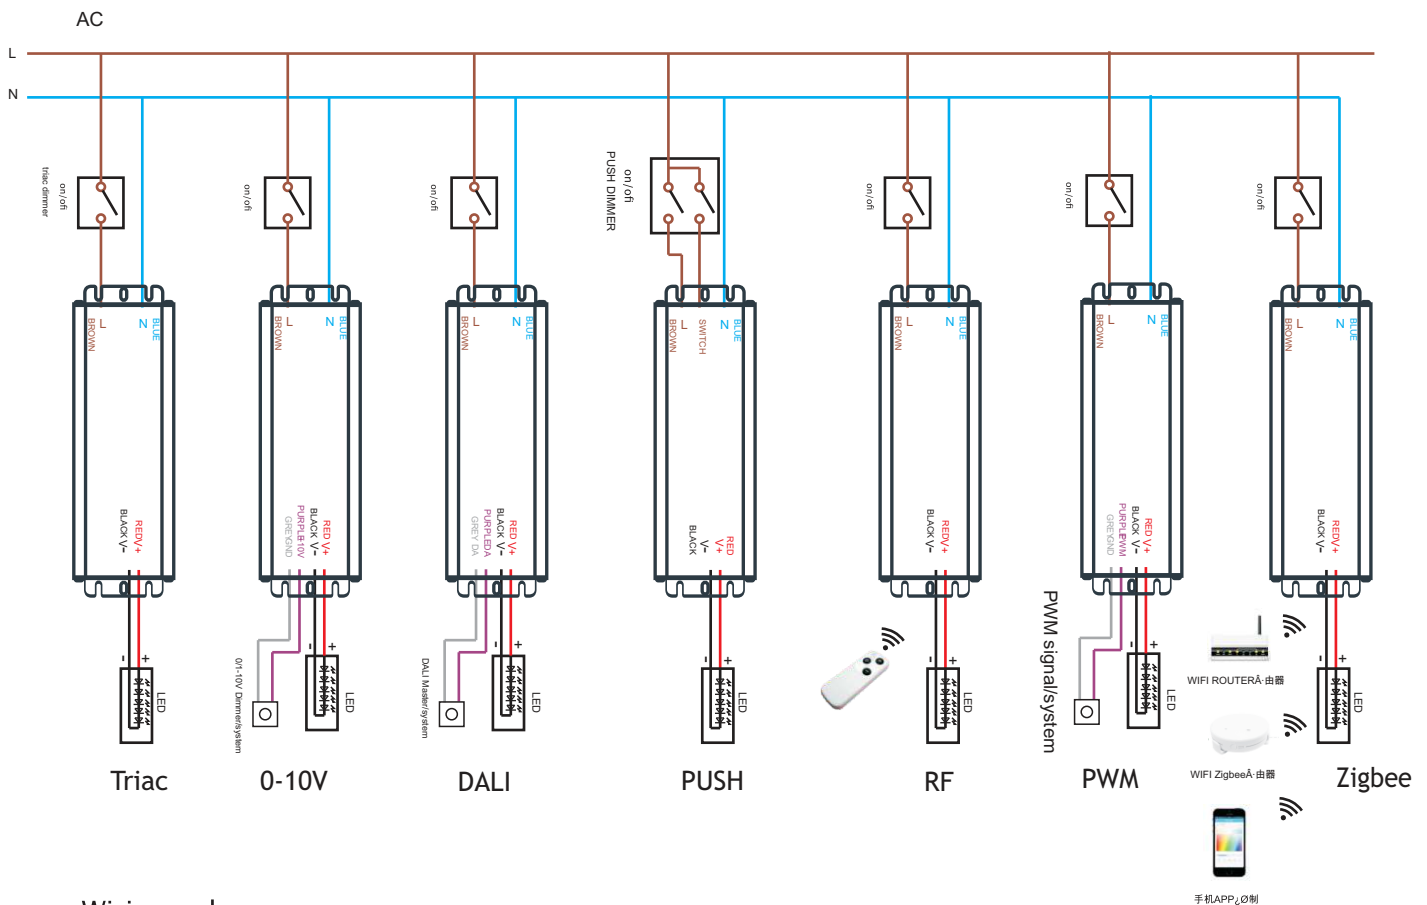

Wiring color

Input		Color	Output	Color	Dimmer line		Color
110V/AC	L	BLACK	+	RED	0-10V PWM	10V	PURPLE
	N	WHITE				GND	GREY
220V/AC	L	BROWN	-	BLACK	DALI	DA	PURPLE
	N	BLUE				DA	GREY