

ITEM NO. : VLED-3S7008

3V | 6V | 12V | 24V



Description

Low-voltage mini-LED downlights in two nish options with energy efficient LED downlight and 80+&90+CRI

Features

- Cast aluminum heat sink maximizes life of LEDs
- Smooth, frosted acrylic lens provides even distribution of light
- Adjustable 120° swivel lens
- IP44 Rated housing

Mounting


Recessed mount

Applications

Display shelves, under-cabinets


Warranty

3-5 years

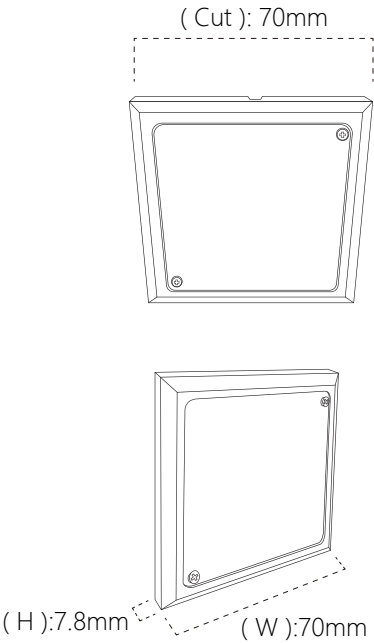

Technical Information

Voltage	3V / 6V / 12V / 24V DC	
CCT	2700K-6500K	
CRI	>80	>90
Wattage	3W	
Lumens	150-180Lm	280-300Lm
Beam Angle	120°	
Dimming	Yes	
Dimensions	(L) 70mm × (W) 70mm x (H) 7.8mm	
Rating	Indoor, dry locations	
Rated Life	35,000 Hours	

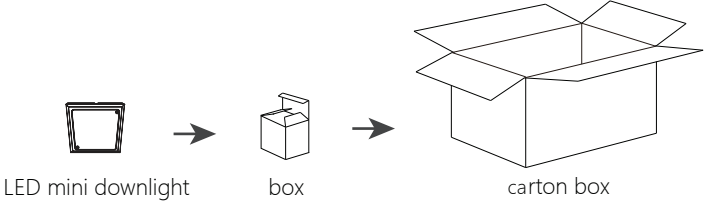

Packinginformation			
Sizeofinnerbox	75*74*63mm	1pc/box	0.096kg/pc
Sizeofouterbox	320*310*340mm	80pcs/ctn	10.6kgs/ctn