

ITEM NO. : VLED-SL3R5243

3V | 6V | 12V | 24V



**Description**

Low-voltage mini-LED downlights in two nish options with energy efficient LED downlight and 80+&90+CRI

**Features**

- Cast aluminum heat sink maximizes life of LEDs
- Smooth, frosted acrylic lens provides even distribution of light
- Adjustable 30°/45°/60° swivel lens
- IP44 Rated housing

**Mounting**


Recessed mount

**Applications**

Display shelves, under-cabinets


**Warranty**

3-5 years

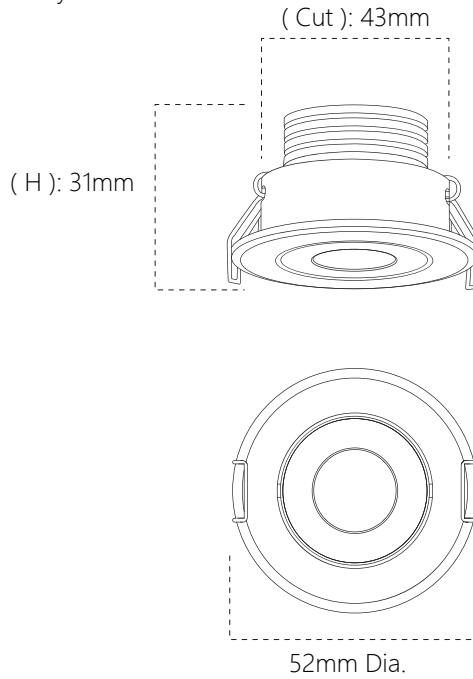

 **Technical Information**  
Indoor

Voltage	3V / 6V / 12V / 24V DC	
CCT	2700K-6500K	
CRI	>80	>90
Wattage	3W	
Lumens	150-180Lm	280-300Lm
Beam Angle	30°/45°/60°	
Dimming	Yes	
Dimensions	Φ52mm × 31mm (H)	
Rating	Indoor, dry locations	
Rated Life	35,000 Hours	

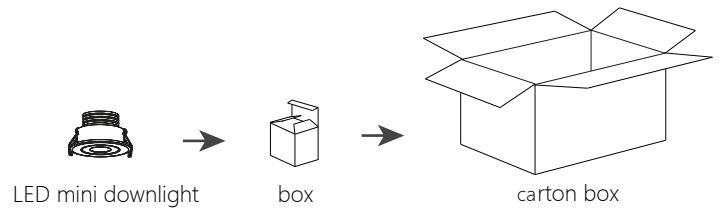

Packing information			
Size of inner box	50*50*55mm	1pc/box	0.096kg/pc
Size of outer box	265*215*295mm	100pcs/ctn	10.6kgs/ctn